
LUXURY CARPET TILES
LOOM FLOR
VELORA



VA-01 + VA-02 + VA-03 + VA-08 + VA-09




VA-01 + VA-04 + VA-05



VA-01 + VA-04 + VA-05 + VA-06 + VA-07




VA-01 + VA-06 + VA-07


VA-01 + VA-08 + VA-09



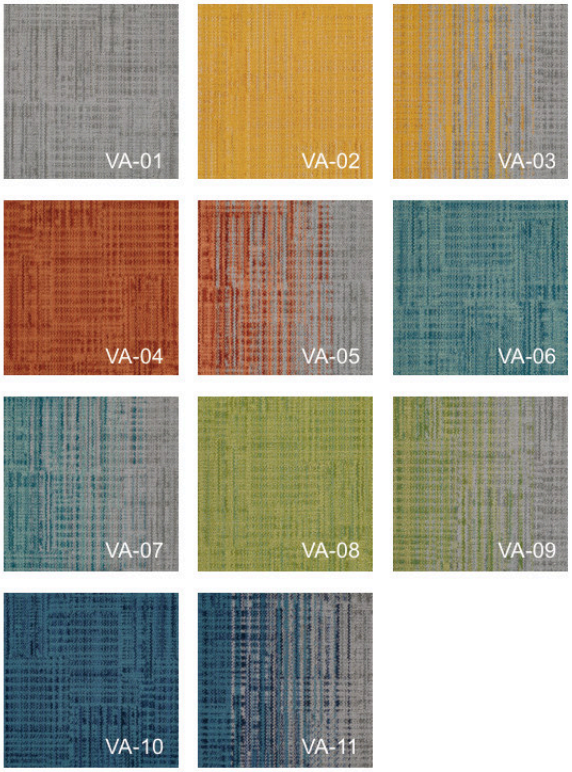

SPECIFICATIONS

Product Construction	: Multi - level loop
Yarn System	: Universal Nylon6
Dye Method	: 100% Solution Dyed
Primary Backing	: Non-woven
Secondary Backing	: PVC reinforced with fibleglass
Tufted Yarn Weigh	: 23 oz/sq.yard
Machine Gauge	: 1/12
Pile Weight	: 650g/m² (±20g/m²)
Pile Height	: 3mm - 5mm
Stitches	: 48 ends/ 10cm
Number of tufts	: 232000/ sqm
Size	: 50cm x 50cm
Tile Thickness	: 7mm - 8mm
Total weight	: 4.2kg/m² ±3%(PVC Backing)

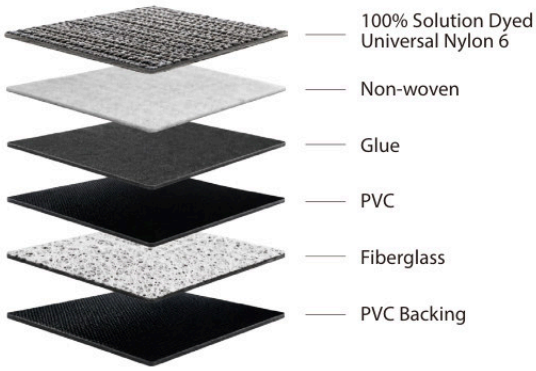

PERFORMANCE

Flooring Radiant Panel	(ASTM E-648) Passes
Smoke Density	(ASTM E-662) <450
Flammability	(ASTM D2859) Passes
Color fastness	AATCC TEST METHOD 16.3/165,GRADE 5
Static	GB/T 18044-2008,1.5KV
Tuft Anchorage	ASTM D1335
Dimensional Stability	ASTM D7570<0.1%
Anti Bacterial	Conforms to the global sterlization system

Health + Environmental Specifications

TVOC	ISO 16000-6:2011,Grade A, <0.5mg/sqm h
Formaldehyde	GB/T 18204.2-2014,Grade A, <0.05mg/sqm h
Styrene	ISO 16000-6:2011,Grade A, <0.4mg/sqm h
4-Phenylcyclohexene	ISO 16000-6:2011,Grade A, <0.05mg/sqm h

Recommended Installation Methods

